



Goo Systems  
 407 Counter St. Unit 60  
 Kingston ON Canada  
 K7K 6A9  
[www.goosystems.com](http://www.goosystems.com)

## Specification Data


The projection viewing surface shall consist of two applications of \_\_\_\_\_ reflective base coat and two applications of \_\_\_\_\_ diffusive top coat.

The coatings shall be water-based acrylic emulsions having a viscosity (poise) range of minimum 200 to maximum 675.

The coatings shall be applicable by rolling or spraying and shall provide minimum coverage levels as indicated below:

Coverage Levels				
Quantity	Rolled		Sprayed	
	square feet	square meters	square feet	square meters
500 mL	25.00	2.33	20.00	1.86
1000 mL	50.00	4.65	40.00	3.72
2.3 L	115.00	10.68	92.00	8.55
3.78 L	189.00	17.56	151.20	14.05
16 L	800.00	74.33	640.00	59.46

The finished application of coatings shall meet performance parameters indicated below:

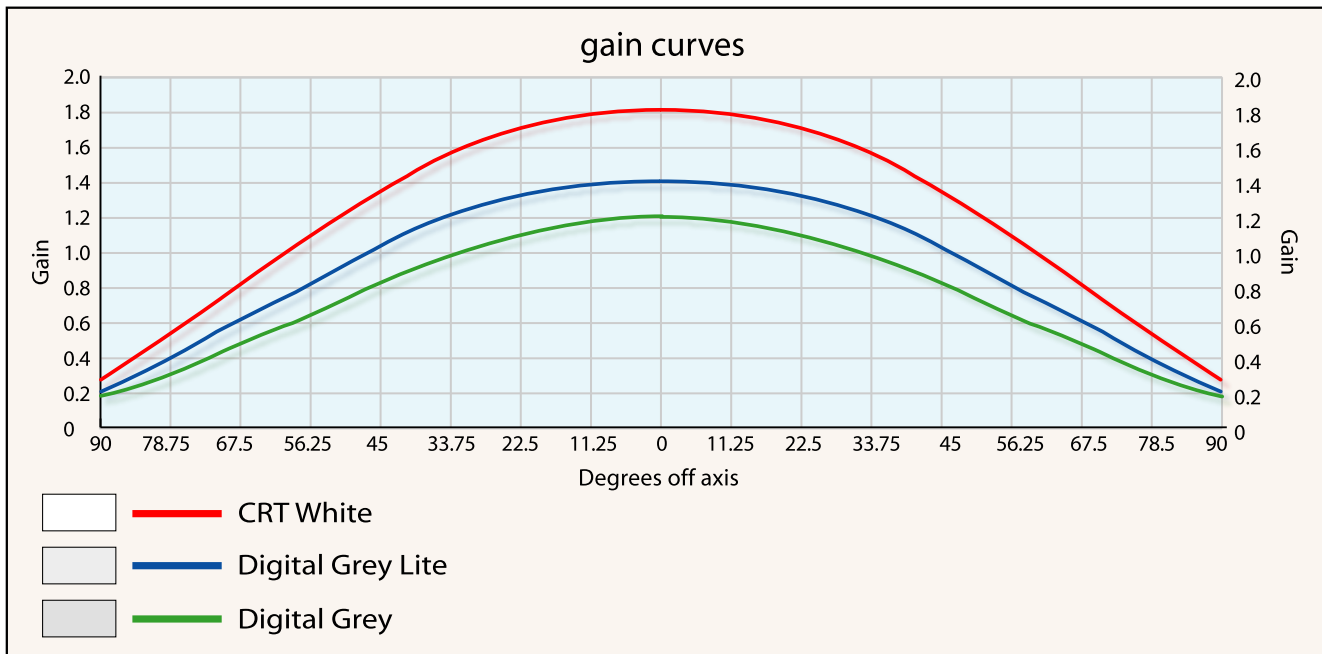

The coatings shall be Goo Systems Screen Goo.

Distributed by: